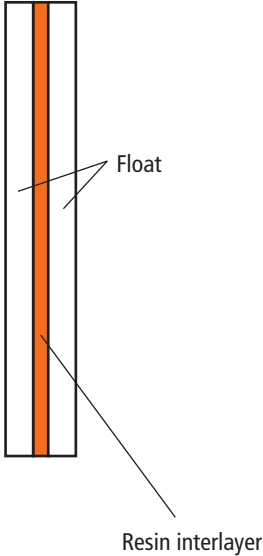

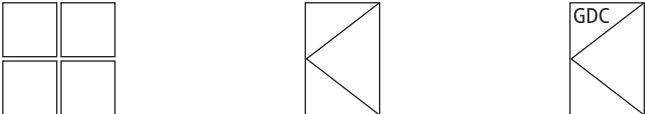


Product composition	Characteristics <span style="float: right; background-color: orange; color: white; padding: 2px 5px; font-weight: bold;">1</span>	
	<ul style="list-style-type: none"> <li>▶ Pyroguard EW30 Impact is cuttable with standard equipment</li> <li>▶ Available in stock sheets 1580 x 2780 mm</li> <li>▶ Installation interior and exterior (UV stable)</li> <li>▶ Double sided fire resistance</li> </ul>	
Technical characteristics	Physical features	
<ul style="list-style-type: none"> <li>▶ Fire classification: EW30</li> <li>▶ Impact classification: 2B2</li> <li>▶ Light transmission: 87%</li> <li>▶ Sound reduction: 33 dB</li> <li>▶ U value: 5.1 W/m<sup>2</sup> K</li> <li>▶ UV stability: yes</li> </ul>	<ul style="list-style-type: none"> <li>▶ Nominal Thickness: 7 mm</li> <li>▶ Thickness tolerances: - 0.6 / + 0.8 mm</li> <li>▶ Weight/m<sup>2</sup>: 17 kg</li> <li>▶ Temperature range: - 20 / + 140 °C</li> <li>▶ Min manufactured size:</li> </ul>	
<div style="background-color: orange; width: 40px; height: 30px; margin: 0 auto;"></div>	Possible applications	
	<p style="text-align: center;"> <b>F</b> L E X I B L E  <b>I</b> N D E P E N D E N T  <b>R</b> E S P O N S I V E  <b>S</b> P E C I F I C  <b>T</b> E C H N I C A L  <b>FIRST IN FIRE GLASS</b> </p>	<div style="display: flex; flex-wrap: wrap; justify-content: space-around;"> <div style="text-align: center; width: 30%;"> <p>Steel system</p>  </div> <div style="text-align: center; width: 30%;"> <p>Timber system</p>  </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">Please see PV 12-A-422, page 90</div> <div style="text-align: center;">Please see PV 12-A-423, page 91 &amp; 92</div> <div style="text-align: center;">CF 257 p 18</div> </div>
28	06/2015	

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.