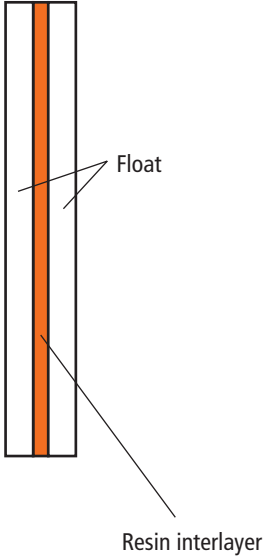



Product composition	Characteristics	9
	<ul style="list-style-type: none"> ▶ Pyroguard FD60 is cuttable with standard equipment ▶ Available in stock sheets ▶ Internal and external installation (UV stable) ▶ Double sided fire resistance 	
Technical characteristics	Physical features	
<ul style="list-style-type: none"> ▶ Fire classification: E60 ▶ Impact classification: 3B3 ▶ Light transmission: 87% ▶ Sound reduction: 33 dB ▶ U value: 5.1 W/m² K ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: 7 mm ▶ Thickness tolerances: - 0.6 / + 0.8 mm ▶ Weight/m²: 17 kg ▶ Temperature range: - 20 / + 140 °C ▶ Min manufactured size: 	
	Possible applications	
<p style="text-align: center;"> F L E X I B L E I N D E P E N D E N T R E S P O N S I V E S P E C I F I C T E C H N I C A L FIRST IN FIRE GLASS </p>	<p style="text-align: center;"> Timber system  CF 257 p 20 </p>	
36	06/2015	

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.